



Bravo-Aranda, J. A.; Haeffelin, M.; Piermarini, S.; Pietras, C.
Contact: jbravo@lmd.polytechnique.fr

IPRAL's technical specifications

Near and far-field telescope

Near and far-field telescopes and a high laser power improves the signal-to-noise ratio allowing:



- better aerosol optical property retrievals
- reduction of the statistical errors
- **reducing biases between ground-based and satellite measurements distinguishing signal from error bars to lead better satellite cal/val**
- better cirrus and aerosol optical depth measurements to derive satellite optical depths products.

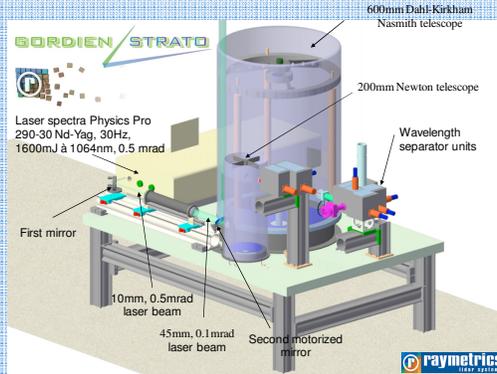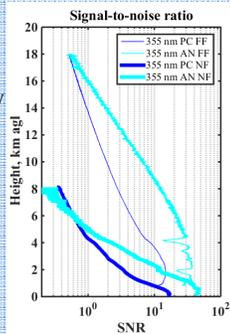

IPRAL's autonomous operation capability (including remote control and automatic safety systems) minimizes operator costs.

Wavelength separator unit

- Interferometers at Raman and elastic wavelengths specially designed for night- and day-time Raman measurements.
- Optical path of the elastic and H₂O-Raman channels designed to have the same overlap function.
- Dichroic mirrors designed with no phase-shift and diattenuation.

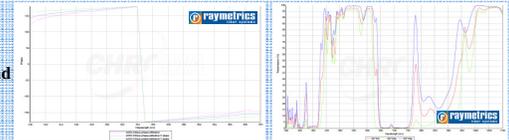


Depolarization improvements

Lidar polarizing sensitivity can drastically affect the volume linear depolarization ratio (δ). To determine its influence on depolarization measurements, the δ systematic error ($\Delta\delta$) was quantified using the **Polarimetric Lidar Simulator** based on the Stokes-Müller theoretical basis (see, Bravo-Aranda, 2016 and Freudenthaler, 2016).

Lidar systems is subdivided in functional blocks including

- the laser beam (I_L)
- the emitting optics (M_E)
- the receiving optics (M_O)
- calibrator (C),
- the polarizing splitter (M_R and M_T)
- And the received signals (I_R and I_T)

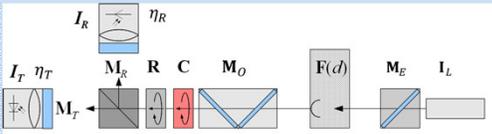


IPRAL signal was simulated according to 12 lidar parameters shown on Table on the right suitable behaviour of the polarizing splitter is highlighted:

- without cross-talk
- absence of phase-shift
- and low diattenuation of the receiving optics.

Functional block	Symbol	Property	Value	Error (±)
Laser, I_L	α	Misalignment angle of the laser polarizing plane ¹	0°	2.0°
		D_E Effective diattenuation	0.00	0.05
Steering optics, M_E	Δ_E	Effective phase shift	0°	180°
		β Effective misalignment angle ¹	0°	1.0°
		D_o Effective diattenuation	-0.012	0.012
Receiving optics, M_O	Δ_o	Effective phase shift	0°	-
		γ Effective misalignment angle ¹	0°	0.5°
		ϵ Misalignment angle ¹	0°	0.1°
Calibrator, C (0-order waveplate in front of splitter)		Polarizing components	Parallel + perpendicular	
		T_p Parallel-polarised ¹ transmittance	1	-
Polarizing splitter, M_R and M_T (PBS + polarizers)		T_s Perpendicular-polarised ¹ transmittance	0	-
		R_p Parallel-polarised ¹ reflectance	0	-
		R_s Perpendicular-polarised ¹ reflectance	1	-

Monte Carlo technique is used to retrieve IPRAL's $\Delta\delta$:

- using Constant Δ_o , D_T and D_R
 - parametrizing α , D_E , β , γ , and ϵ_T using 3 values
 - parametrizing D_o and Δ_E were parameterized using 65 values
- $3^5 65^2 \sim 1 \cdot 10^6$ lidar combinations were simulated. minimum and maximum of the δ histogram lead to $\Delta\delta$. Table below shows relative systematic error ($\Delta\delta/\delta$) of 16% for $\delta > 0,05$.

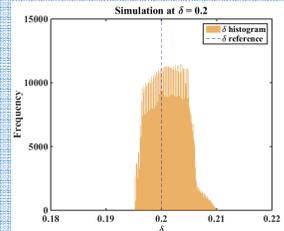

δ	$\Delta\delta$	$\Delta\delta/\delta$ (%)
0,05	0,008	16
0,1	0,010	10
0,2	0,015	8
0,3	0,019	7
0,45	0,030	6

As ADM-Aeolus and IPRAL measure at 355 nm, the optimal characterization of IPRAL's depolarization provides a suitable framework for satellite cal/val.

Multi-instrumental intercomparison

IPRAL is part of several national (SOERE ATMOS) and international (EARLINET, Pappalardo et al., 2014) lidar networks to perform multi-instrumental cal/val procedure with different aerosol types and under different atmospheric conditions. This networking effort is crucial for:

- the characterization of the deviation between L2A and ground-based lidar products,
- the development of improved processing algorithm based on the characterization of the deviation of the L2A products, and
- the exploitation of the long-term space- and ground-based aerosol database.

References

- Dupont et al., Macrophysical and optical properties of midlatitude cirrus clouds from four ground-based lidars and collocated CALIOP observations. JGR, vol. 115, D00H24
- Pappalardo et al., 2014: EARLINET, the European Aerosol Research Lidar Network. Atmos. Meas. Tech., 7, 2389-2409, 2014
- Freudenthaler, 2016: About the effects of polarising optics on lidar signals and the $\Delta 90$ -calibration. doi:10.5194/amt-2015-338
- Bravo-Aranda et al., 2016: Assessment of lidar depolarization uncertainty by means of a polarimetric lidar simulator. doi:10.5194/amt-2015-339

The development of IPRAL was realized with the support of And the following organisms:

